

VECTOR V2 TAIL LIGHTS

(2005-2009 MUSTANG ALL)

INSTALLATION INSTRUCTIONS


CONTENTS

(1) LH Tail Light
(1) RH Tail Light

TOOLS REQUIRED

11mm Deep Socket Or Wrench
Flat-Head Screwdriver Or
Trim Removal Tool

STEP 1

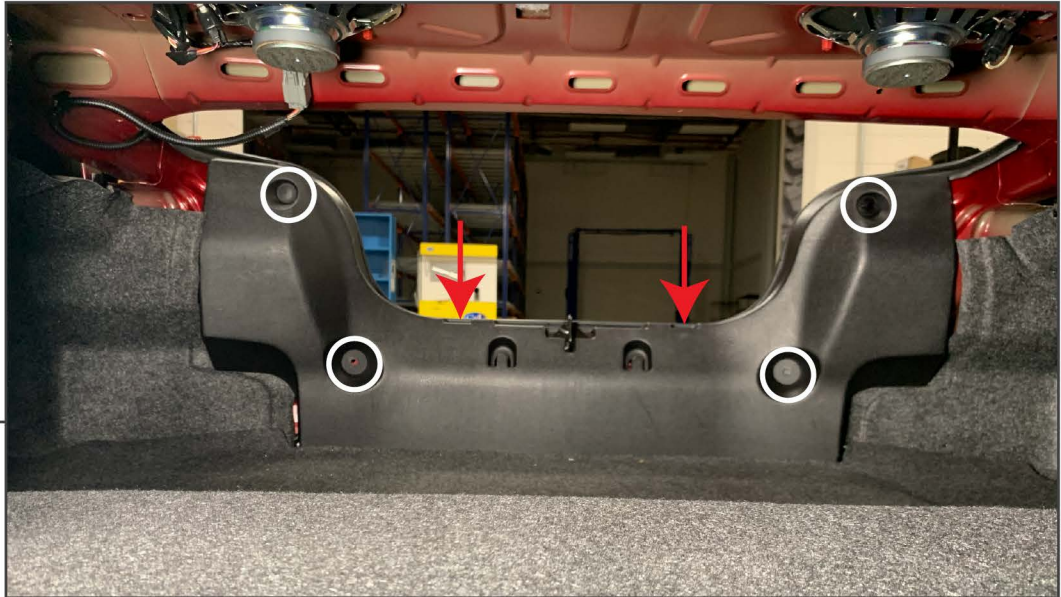

Open the trunk and remove the plastic trunk liner by removing the (6) clips securing it to the vehicle.

STEP 2



Remove the (3) 11mm nuts holding the factory tail light to the vehicle.

STEP 3



Unplug the taillight harness from the main connector, and pull the grommet and harness through the body hole. Remove tail light from the vehicle.

STEP 4



Install the new taillights by reversing the steps. Installation is now complete.