



DOOR HINGE PIN BUSHINGS W/ REMOVAL TOOL

(2007-2018 WRANGLER JL)

INSTALLATION INSTRUCTIONS

CONTENTS

(8) Bushings
(1) Removal Tool

TOOLS REQUIRED

T50 Torx Bit/Driver
Hammer


SKU # J135789

STEP 1




Begin by removing the T-50 Torx nuts securing the door to the vehicle. Locate and disconnect the door's electrical connection. Lift the door off the vehicle and store it in a safe place.

STEP 2

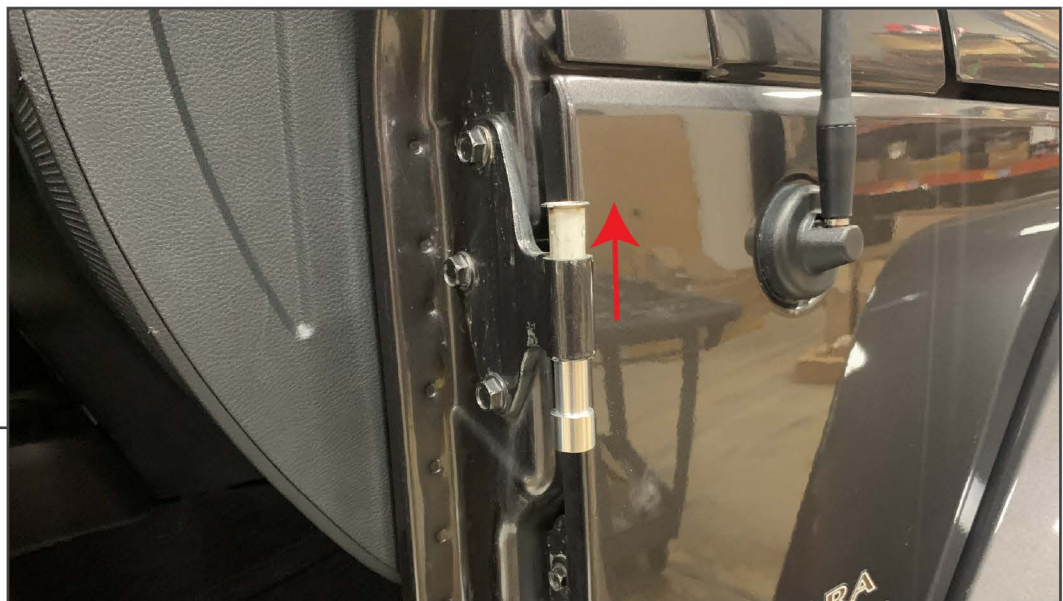

Using the supplied removal tool, gently tap the old bushing out of the hinge.

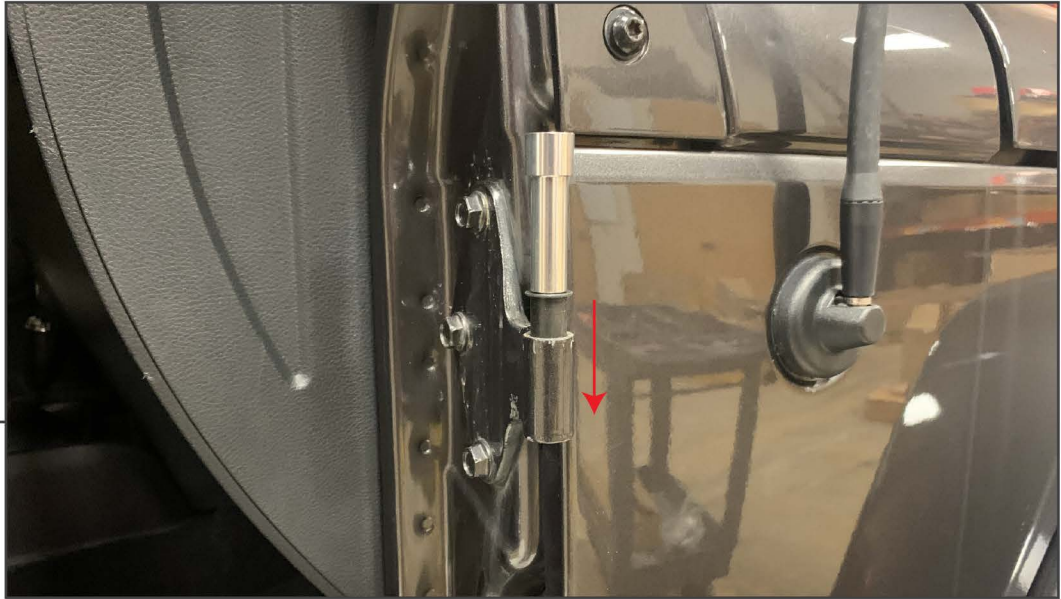

STEP 3

Once the old bushing is removed, install the new bushing. Gently tap the bushing in into place. Repeat the process as needed. Reinstall the door in reverse order.