

DOOR HANDLE RECESS GUARDS

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

(5) Door Handle Recess Guards

TOOLS REQUIRED


Isopropyl Alcohol Microfiber Cloth





STEP 1

Clean the area under the door handle using isopropyl alcohol and a microfiber cloth.

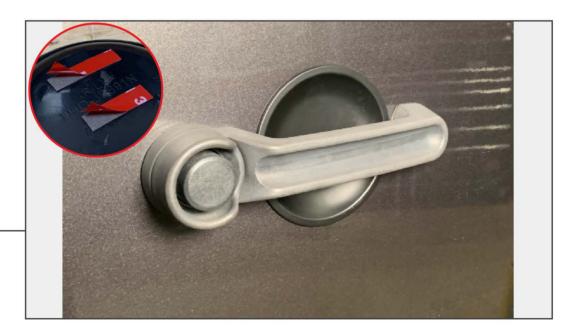

STEP 2

Peel back the film of the double sided tape. Route the handle recess guard around the door handle, then firmly press the guard into place to adhere the double sided tape. Repeat procedure for the remaining door handles.

Installation is now complete.