



SPARE TIRE DELETE WITH LICENSE PLATE MOUNT

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS


CONTENTS

- (1) Rear Plate
- (1) License Plate Bracket
- (2) Small Grommets
- (1) Large Grommet
- (4) M6 Allen Bolts
- (4) M6 Lock Nuts
- (4) M6 Flat Washers

TOOLS REQUIRED

- 10mm, 13mm, 21mm Sockets
- Ratchet
- Flathead Screwdriver
- 4mm Allen Key

SKU # J157742

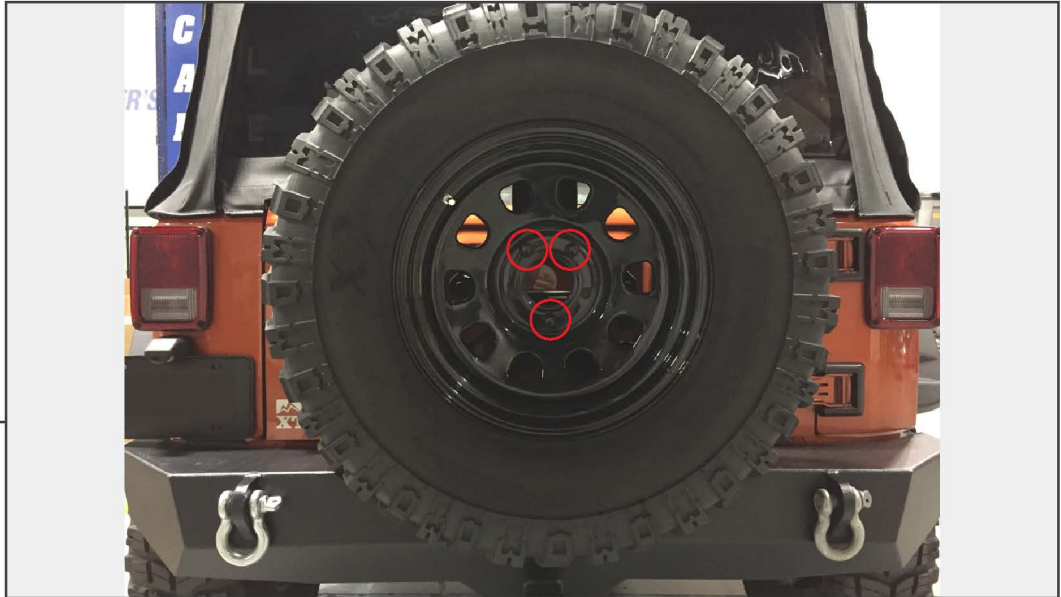


STEP 1

Remove the spare tire from the vehicle by removing (3) 21mm lug nuts. Lift and set the spare tire aside.




STEP 2

Remove the (2) spare tire bumpers. Twist and pull each bumper until removed.

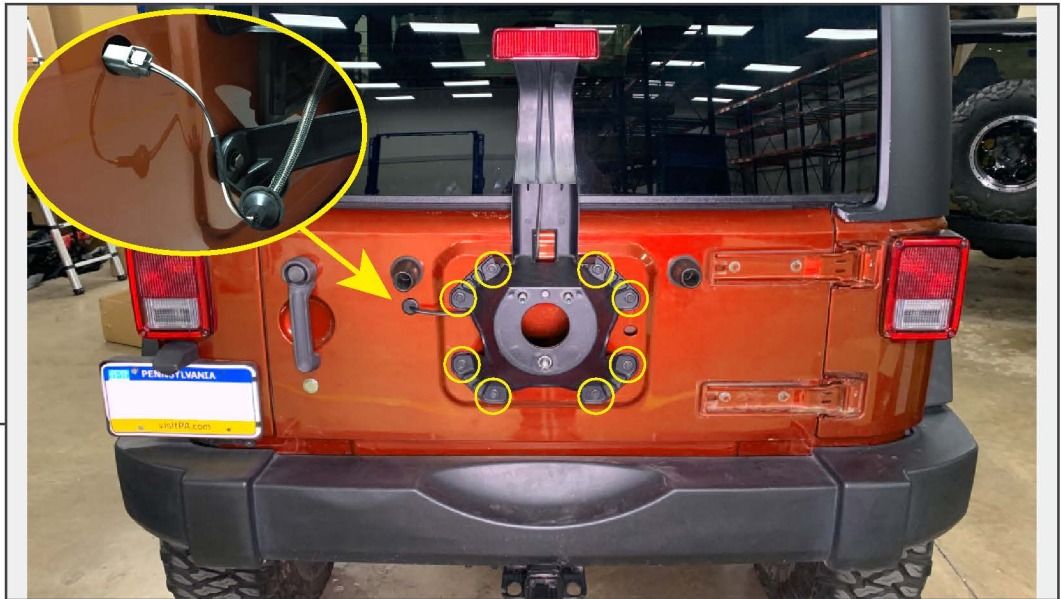

STEP 3

Remove the third brake light grommet from the tailgate by pulling the grommet outwards. Unplug the electrical connection. Remove (8) 13mm bolts from the tire carrier. Remove tire carrier and set aside.

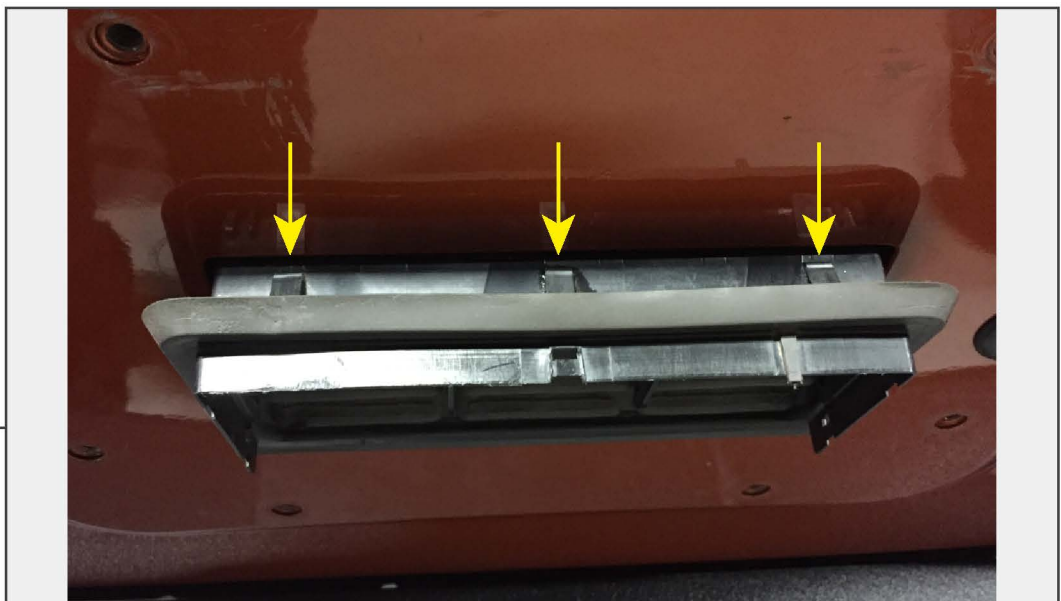

STEP 4


Using a flathead screwdriver, apply downward pressure to the tailgate vent mounting tabs. While pressing down, pull the vent away from the tailgate. Set vent aside once removed.



STEP 5

Install the license plate to the license plate bracket using (4) M6 Allen bolts, (4) M6 flat washers, and (4) M6 nuts. Tighten until secure.

Note: License plate is installed for photo purposes only.

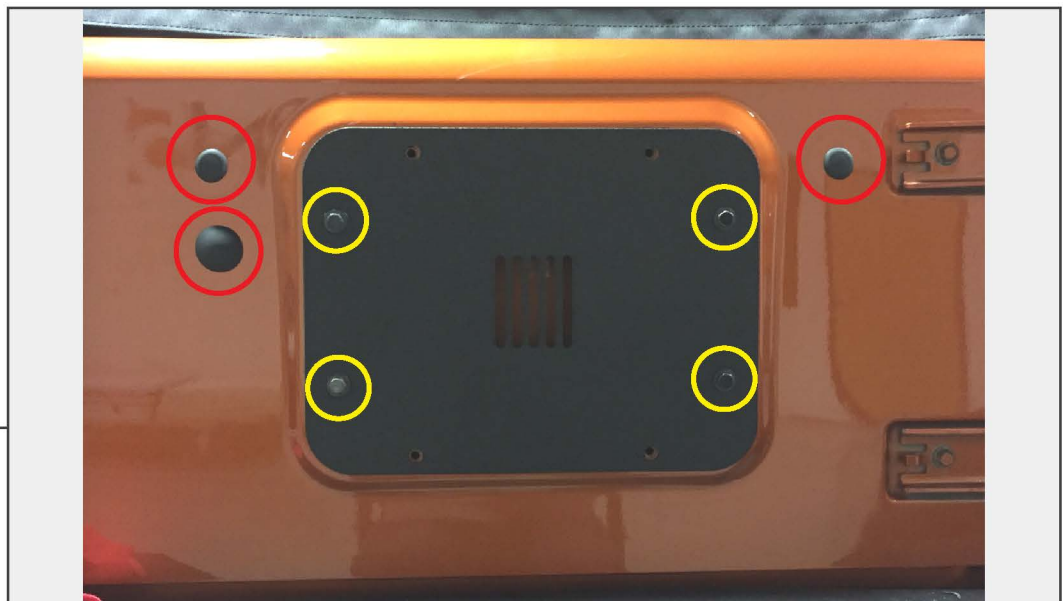

STEP 6

Loosely install the rear plate to the tailgate re-using the original (4) 13mm bolts. Install the (2) small grommets into the previous spare tire bumper holes in the tailgate. Install (1) large grommet into the third brake light wiring harness hole in the tailgate.



STEP 7

Align the license plate bracket to the rear plate on the vehicle, hold in place using the original (4) 13mm bolts. Align the top and bottom of the license plate bracket flush with the rear plate. Tighten all bolts until secure.

Installation is now complete.