



# TWO BAR REMOVABLE ROOF RACK

(2007-2018 WRANGLER JK - 4 DOOR)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---


- (2) Crossover Bars
- (4) Hard top Brackets
- (4) Crossover Brackets
- (4) M10x1.50 50mm Bolts
- (4) M10 Lock Washers
- (4) M10 Nuts
- (4) M10x1.50 Folding Bolts
- (4) Small (20mm OD) M10 Flat Washers
- (8) Large (25mm OD) M10 Flat Washers
- (4) Concave Washers
- (8) Felt Pads

### TOOLS REQUIRED

---

- 16mm Wrench
- 16mm Socket
- Ratchet

SKU # J157744

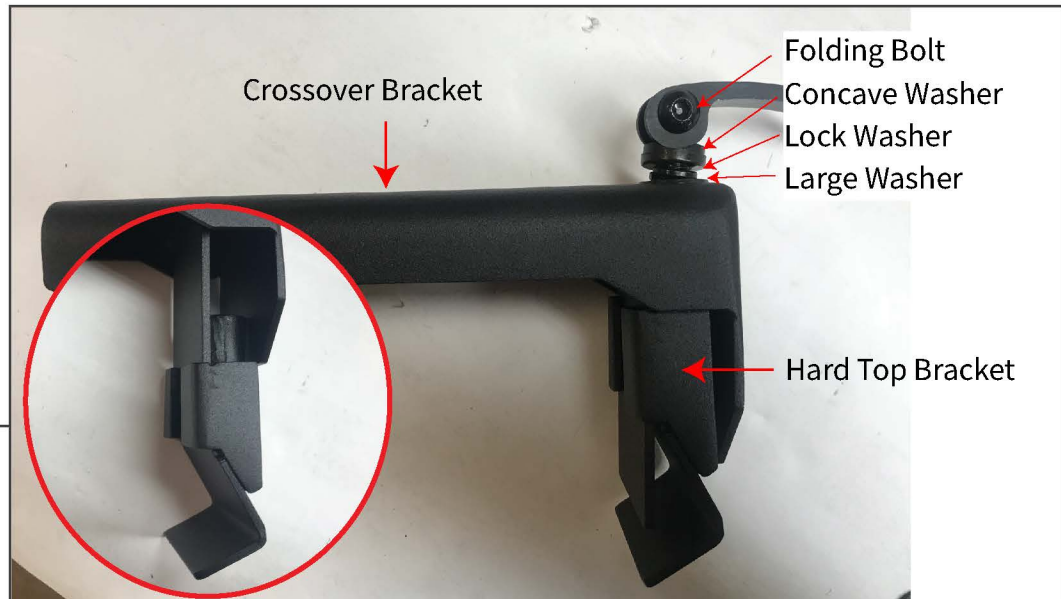

## STEP 1

Begin by assembling the roof brackets by using (1) crossover bracket and (1) hard top bracket. Slide the hard top bracket onto the crossover bracket, then install (1) M10x1.50 Folding bolt, (1) concave washer, (1) M10 lock washer, and (1) M10 large (25mm diameter) flat washer to secure the two brackets together. Do this for all provided brackets.

Note: Leave loose for now for adjustments later.



## STEP 2

Determine where the cross bars are needed for your application. Thoroughly clean the desired mounting locations with soap and water. Allow the surface time to dry completely. Install the supplied felt pads in the same location on both sides of the hard top. The felt pads help reduce the likelihood of scratching the top's finish when the brackets are secured to the vehicle.

## STEP 3



Install brackets onto hard top by sliding the lower portion into the channel. Tighten the folding bolt snug, but do not flip the handle over. Do this for all four brackets.

## STEP 4



Once brackets are attached to the hard top, install the crossover bars sliding them under the hard top brackets, then using (2) M10x1.50 50mm bolts, (2) M10 lock washers, and (4) M10 (20mm diameter) washers per bar to secure them. Once secured, flip the handle on the folding bolts on each hard top bracket, and installation is now complete.