



TAILGATE MOUNTED BOTTLE OPENER

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Mounting Bracket
- (1) Bottle Opener Bracket
- (2) M6x1.00 x 20mm Allen Bolts
- (2) M6 Flat Washers
- (2) M6 Flange Nuts

TOOLS REQUIRED

- 4mm Allen Key/Socket
- 7mm, 10mm Socket
- Ratchet
- Flathead Screwdriver
- Phillips Screwdriver

**STEP 1**

Remove the license plate from the vehicle to reveal the license plate bracket. Remove (4) 7mm screws from the license plate panel.

Note: (2) screws are behind the rear bumper. Bumper may have to be lowered or worked around.

**STEP 2**

Using a flathead screwdriver, release the plastic tab retaining the license plate lamp harness to the bracket. Unplug the connector by pressing the plastic tab inwards. Set license plate bracket aside.

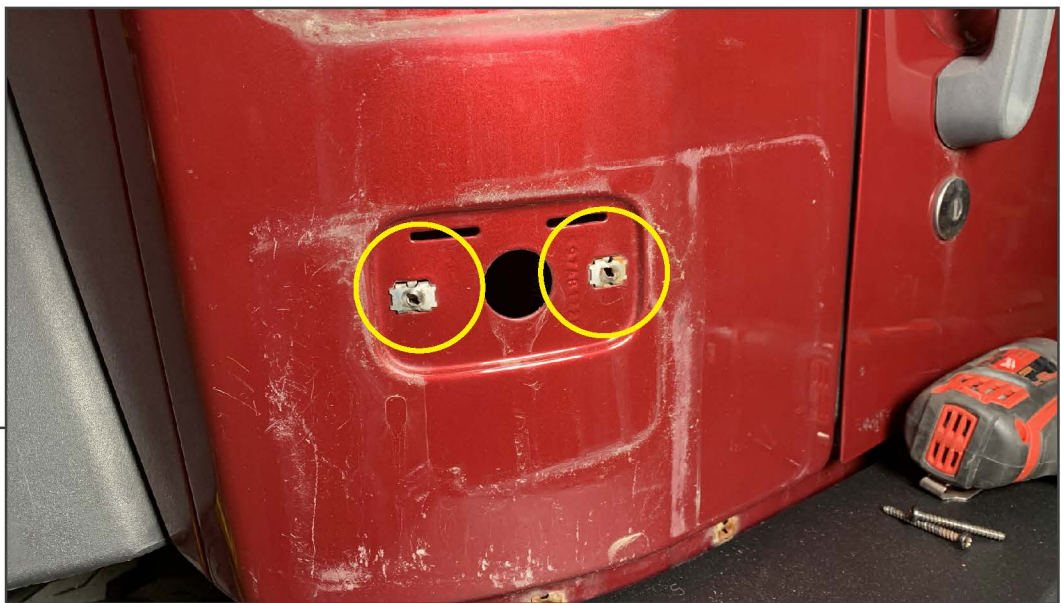
Note: License plate bracket will not be reused.

STEP 3

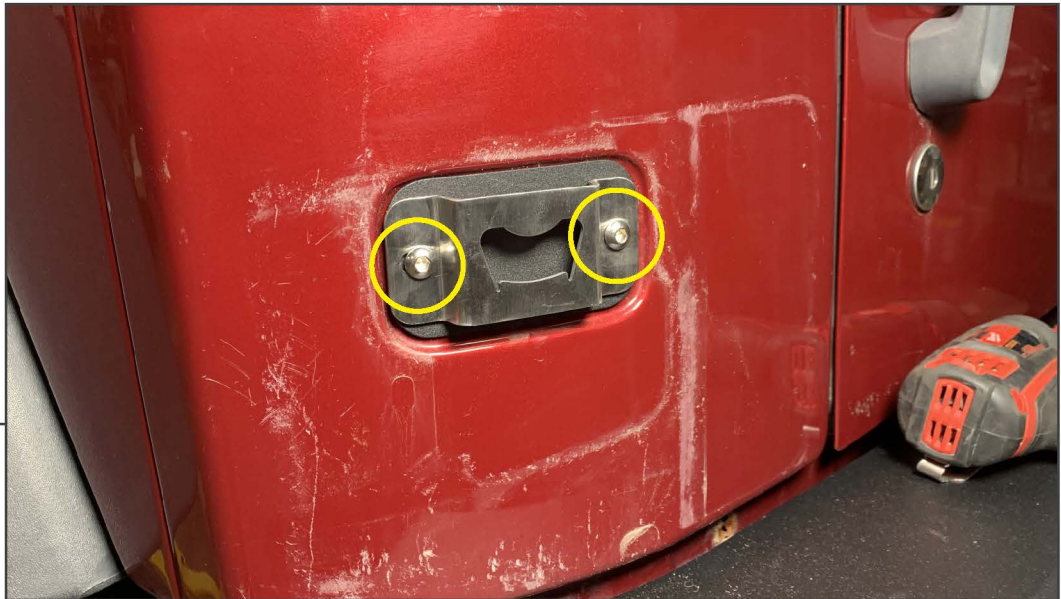


Remove the LH tail lamp by removing the (2) Phillips head screws. Unplug and remove the tail light assembly from the vehicle.

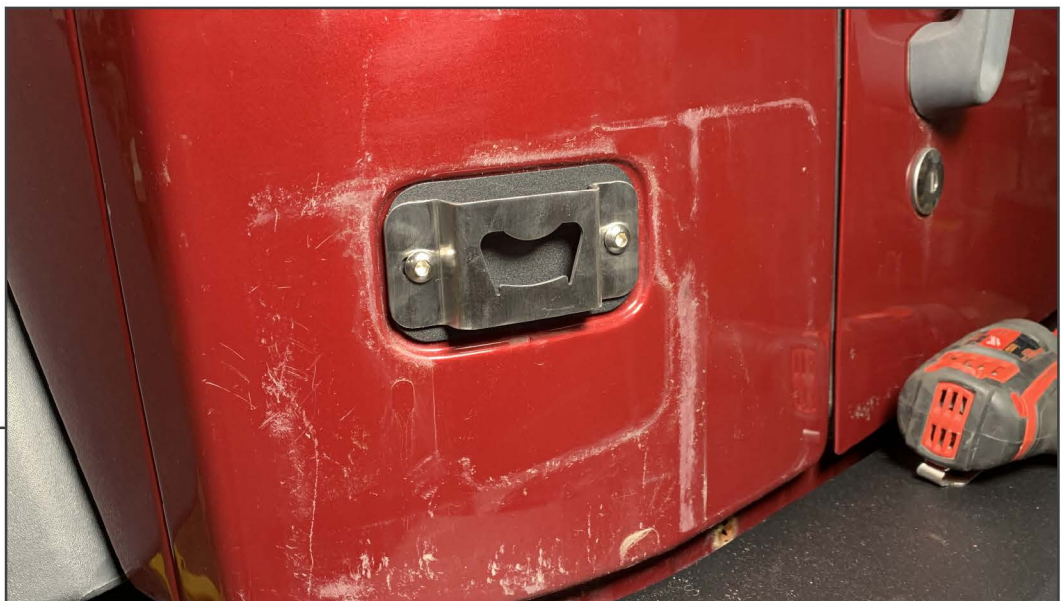
STEP 4



Using a flathead screwdriver, remove the (2) screw inserts in the vehicle body panel.

**STEP 5**

Align the bottle opener bracket and mounting bracket together to the outside of the vehicle. Secure the bottle opener to the vehicle using (2) M6 x 20mm Allen bolts, (2) M6 flat washers, and (2) M6 flange nuts. Tighten until secure.

**STEP 6**

Reinstall the tail light to the vehicle reusing the original hardware.

Installation is now complete.