



REDROCK^{4X4}

Tailgate Table

J166364

(1) Contents:

Qty	Part Name	Size(mm)	Qty	Part Name	Size(mm)
1	Tailgate Table		J×4	Rivet Nuts	M6*15
H×2	Button Head Socket Cap Bolts Screws	M6*16	K×2	Rubber Stopper	M6*11
I×2	Button Head Socket Cap Bolts Screws	M6*25	M×1	Locating Paper	

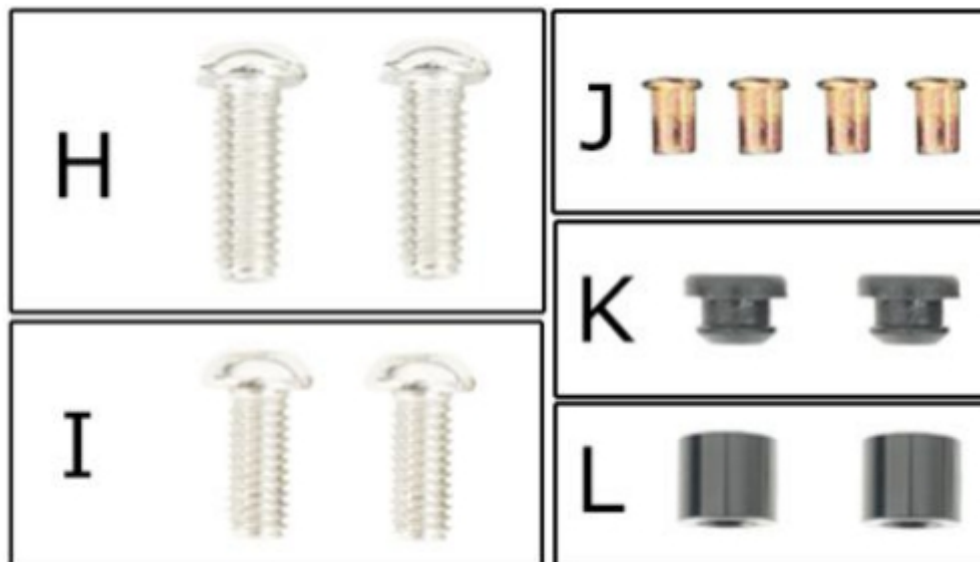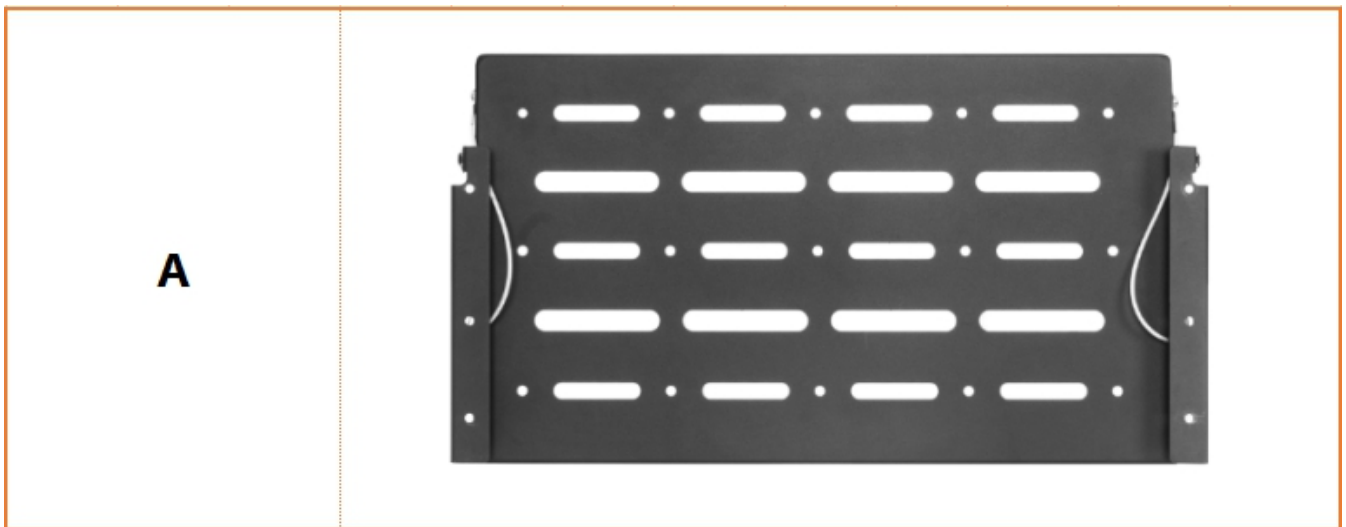

(2) Tools required:

- a. 4mm Hex Bit Socket
- b. Drive Socket Ratchet Wrench
- c. Drill with 9.2-9.5mm Drill Bit
- d. Riveting Nut Gun





(3) Installation time:

About 1 hour, 2 people needed. Installation time may differ according to your mechanical skill level.





(PLEASE VERIFY ALL PARTS ARE PRESENT AND READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION!)

(4) Installation instruction:

Step 1: Find the locating paper and cut it along the line. Then tape the paper on the tailgate.

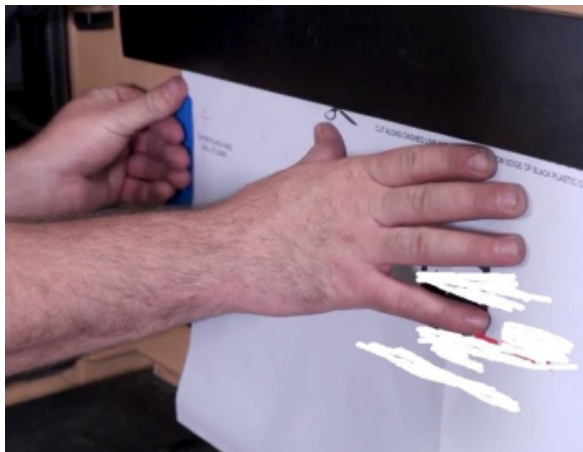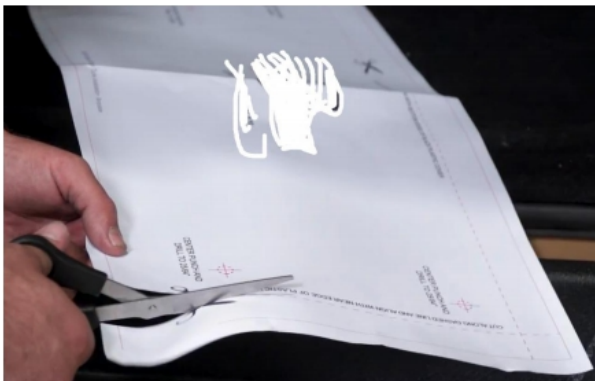




Step 2: With the help of the locating points, drill four mounting holes on the tailgate.

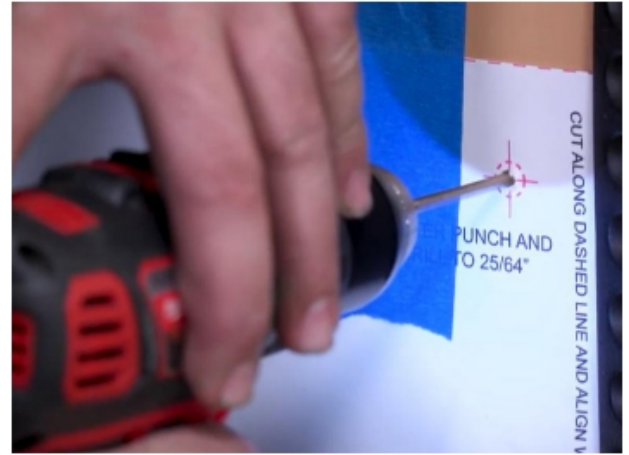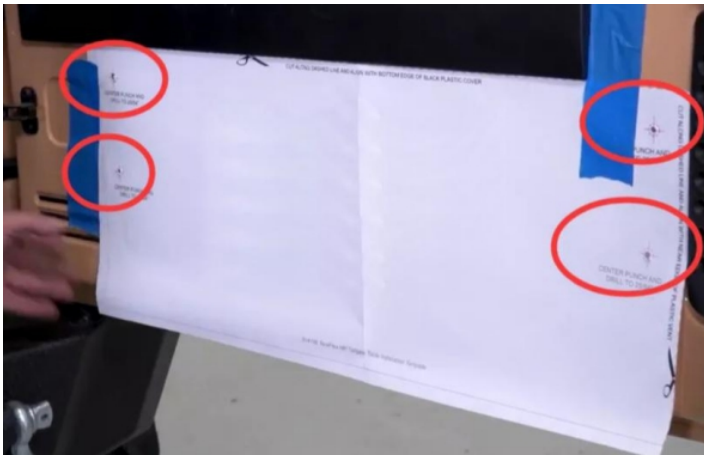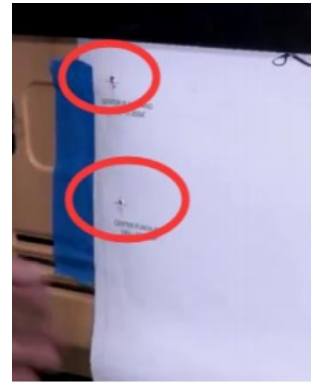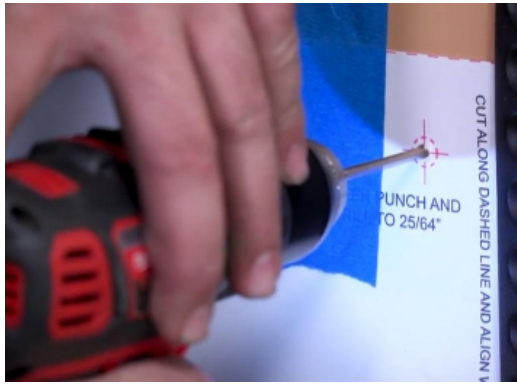

Step 3: Use the riveting nut gun with 6mm nut chuck to install the four riveting nuts.



Step 4: Install the tailgate table with supplied bolts.

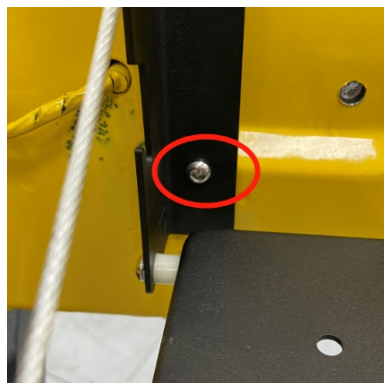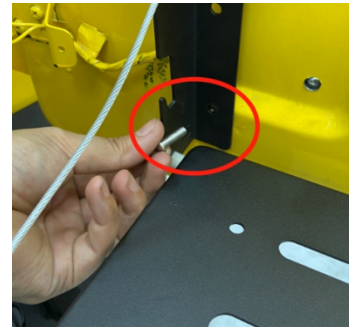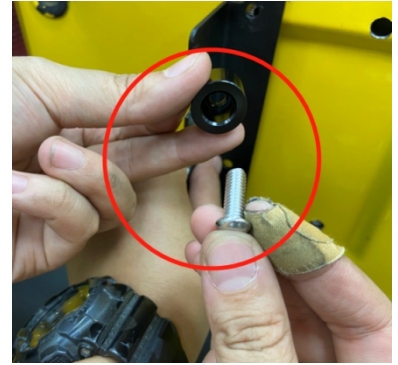

Step 5: Installation is now complete.

