



WHEEL SPACERS

(8-LUG)

INSTALLATION INSTRUCTIONS

CONTENTS

- (2) Wheel Spacers
- (1) Red Thread Locker
- (16) Lug Nuts

TOOLS REQUIRED

- Jack
- Jack Stands
- Lug Wrench
- Torque Wrench
- Wire Brush

SKU # SD11734



STEP 1

Raise the vehicle so that the tires are just off the ground. Support the vehicle with jack stands.



STEP 2


Using a lug wrench, remove the wheel.

STEP 3




Using a wire brush, clean any loose rust from the axle hub.

STEP 4

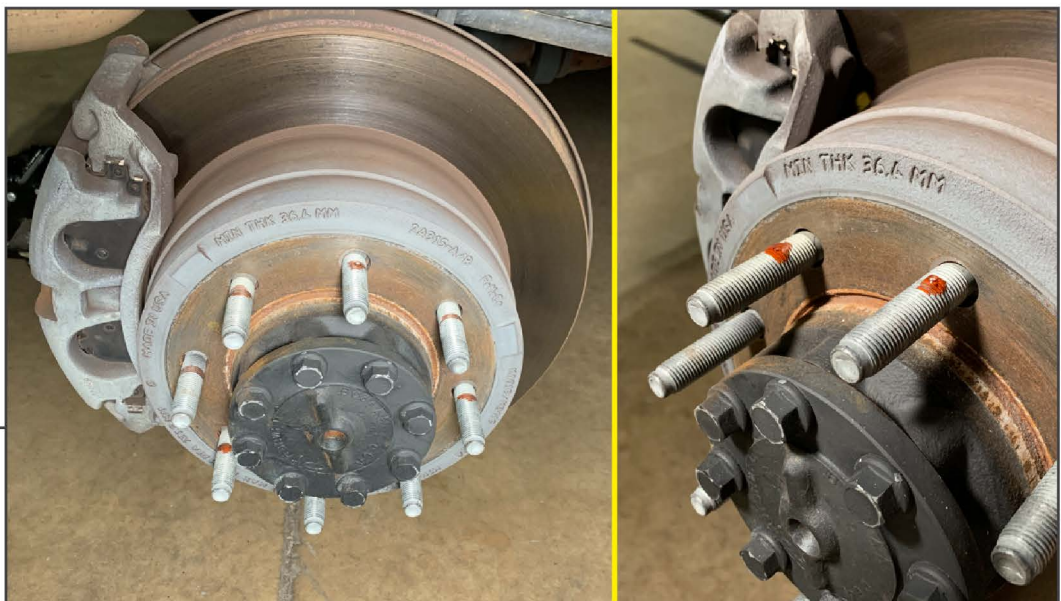

Apply a drop of the supplied thread locker on each wheel stud.

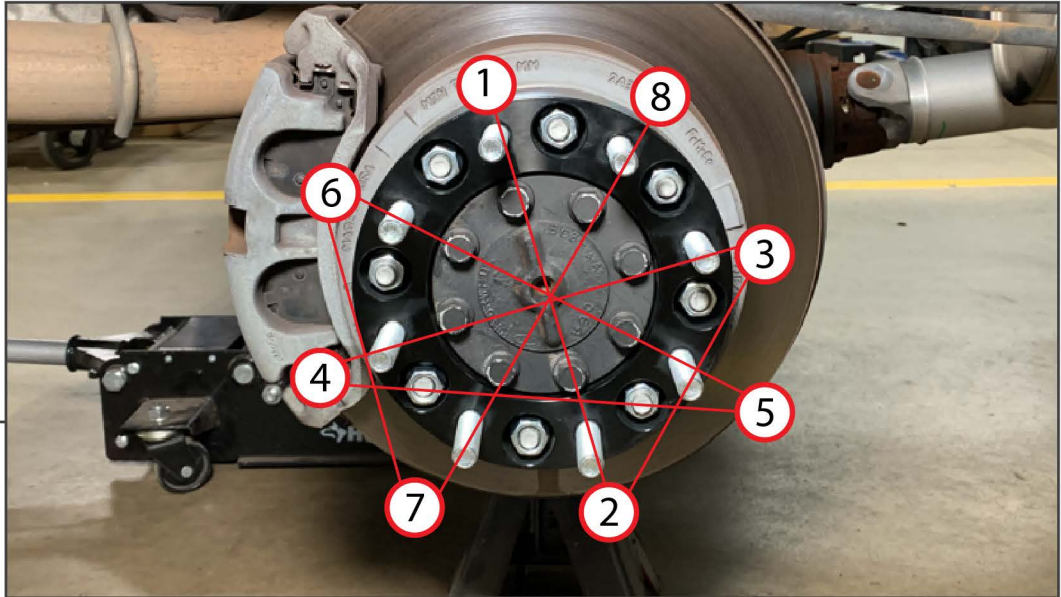

STEP 5

Install the wheel spacer using the supplied lug nuts. Tighten all lug nuts by hand following 1-8 above. Then, torque the lug nuts using the pattern above to 150 lb. ft.



STEP 6

Re-install the original wheel on the new studs. Torque the lug nuts using the pattern shown above to 150 lb. ft. (reference step 5 for torque sequence).

Installation is now complete.