



# CROSS BAR ROOF RACK - 60''

(UNIVERSAL)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (2) Cross Bars w/ Mounts
- (2) Weather Strips
- (4) Chassis Mount "1"
- (4) Chassis Mount "2"
- (4) Chassis Mount "3"
- (4) Chassis Mount "4"
- (4) Locking Threaded Knobs
- (6) Foam Pads
- (2) Keys

### TOOLS REQUIRED

---


- Isopropyl Alcohol
- Microfiber Cloth
- Scissors/Cutters

SKU # T574597



## STEP 1

Locate the mounting location for the roof rack on the vehicle. Once identified, adhere the (1) foam pad onto the vehicle to protect the painted finish.

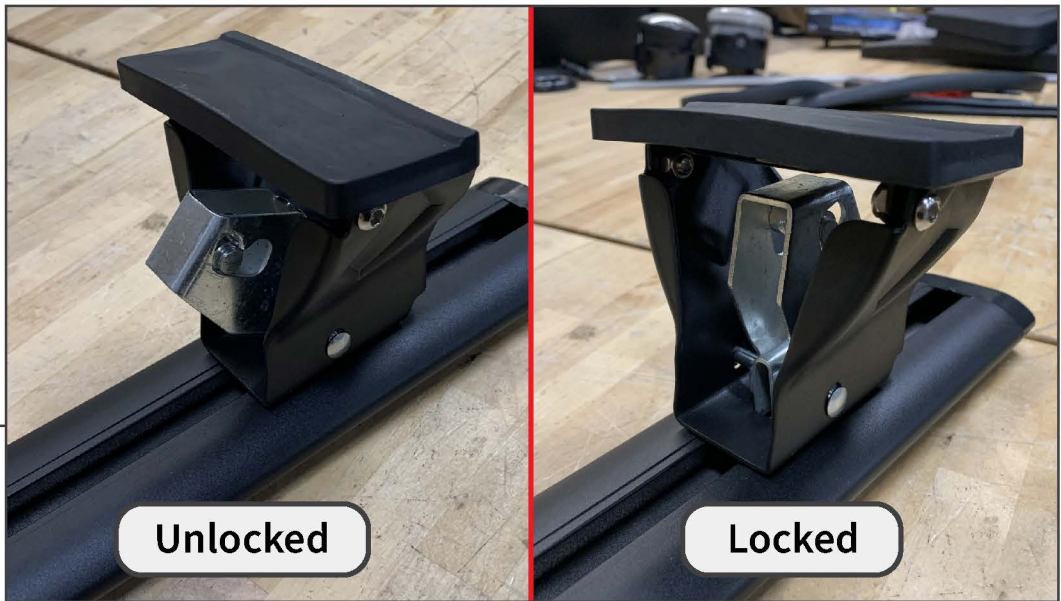

## STEP 2

Place the roof rack on a workable surface. Unlock the mounts on each side, and center/offset the roof rack to fit the application. Test fit to the vehicle to ensure mounting locations and roof rack alignment is correct. Once aligned as desired, lock the mounts into place.

## STEP 3



Install the included weather strip into the bottom side of the roof rack, cut to size as necessary.

## STEP 4



Place the roof rack onto the vehicle. Depending on the vehicle, select the appropriate chassis mount (1-4). Place the lower lip under the door channel, align (1) threaded knob to the threaded insert in the locked mount. Repeat this step for the opposite side, and tighten the knobs evenly.



---

## STEP 5

Once the roof rack is tight to the vehicle, turn the key to lock the knob in place. Close the vehicle door.

Repeat steps 1-5 for the remaining roof rack bar. Installation is now complete.